



SS3040FL-F

SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER

VOLTAGE 40 Volts **CURRENT** 2.4 Amperes


SOD-123FL Unit: inch (mm)

FEATURES

- Fast switching speed
- Surface mount package ideally suited for automatic insertion
- Low power loss, high efficiency
- In compliance with EU RoHS 2002/95/EC directives

MECHANICAL DATA

- Case: SOD-123FL, Plastic
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 0.0168 gram

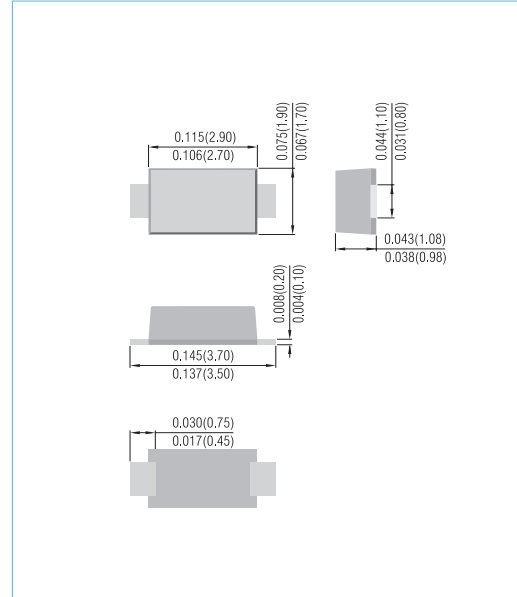

ABSOLUTE RATINGS

PARAMETER	SYMBOL	SS3040FL-F	UNITS
Reverse Voltage	V_R	40	V
Peak Reversr Voltage	V_{RRM}	40	V
Average Rectified Current at $T_A=75^\circ\text{C}$	$I_{F(AV)}$	2.4	A
Non-repetitive Peak Forward Surge Current at $t=8.3\text{ms}$	I_{FSM}	30	A

ELECTRICAL AND THERMAL CHARACTERISTICS

PARAMETER	SYMBOL	SS3040FL-F	UNITS
Minimum Reverse Breakdown Voltage at $I_R=500\mu\text{A}$	V_R	40	V
Maximum Forward Voltage at $I_F=3.0\text{A}$	V_F	0.55	V
Reverse Leakage Current at V_{RRM}	I_R	500	μA
Typical Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	150	$^\circ\text{C/W}$
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-50 to +125	$^\circ\text{C}$

Note.1 Mounted with minimum recommended pas size, PC Board FR4.
2. $T_A=25^\circ\text{C}$ unless otherwise specified.



SS3040FL-F

Rating and Characteristic Curves

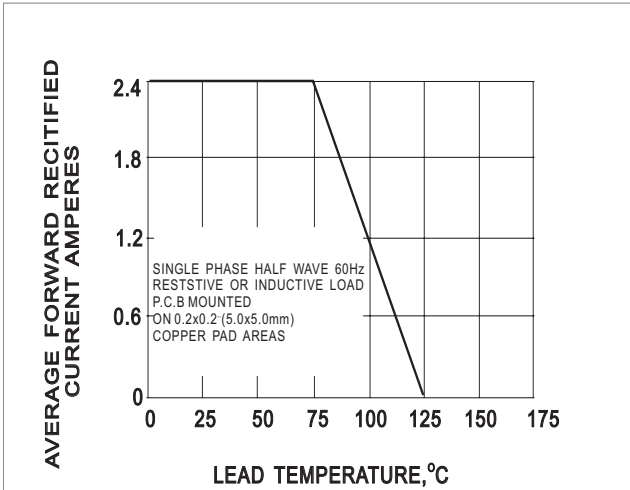


FIG. 1-FORWARD CURRENT DERATING CURVE

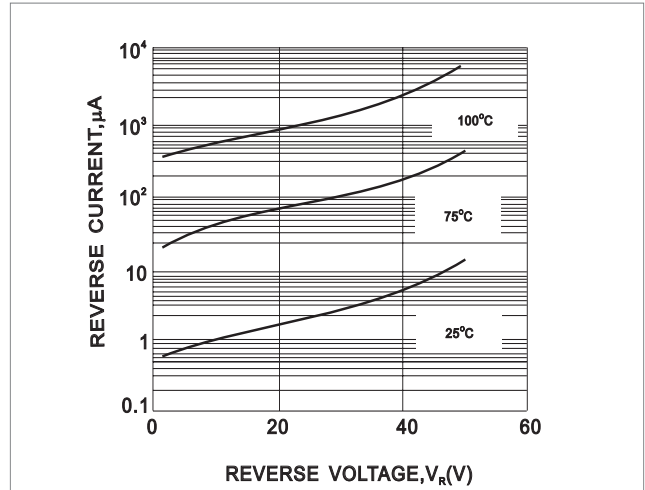


FIG. 2-TYPICAL REVERSE CHARACTERISTIC

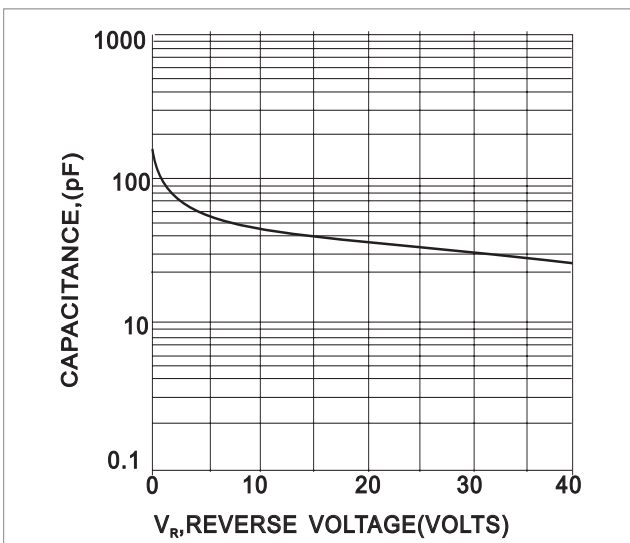


FIG. 3-TYPICAL JUNCTION CHARACTERISTIC

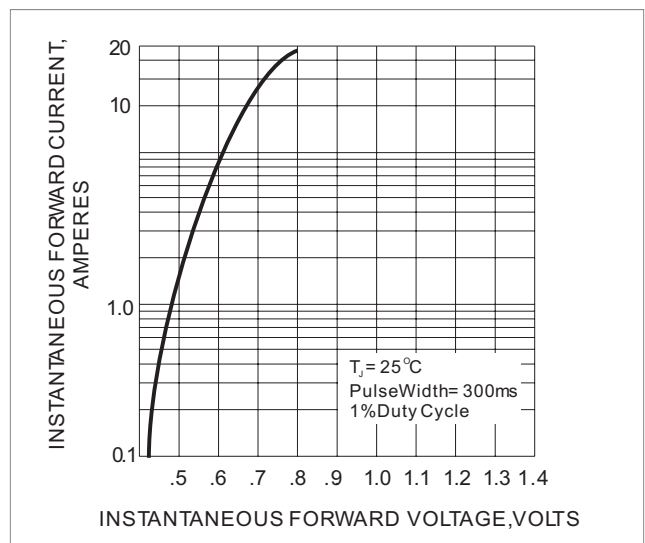


FIG. 4-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS




SS3040FL-F

MOUNTING PAD LAYOUT

SOD-123FL

Unit: inch (mm)

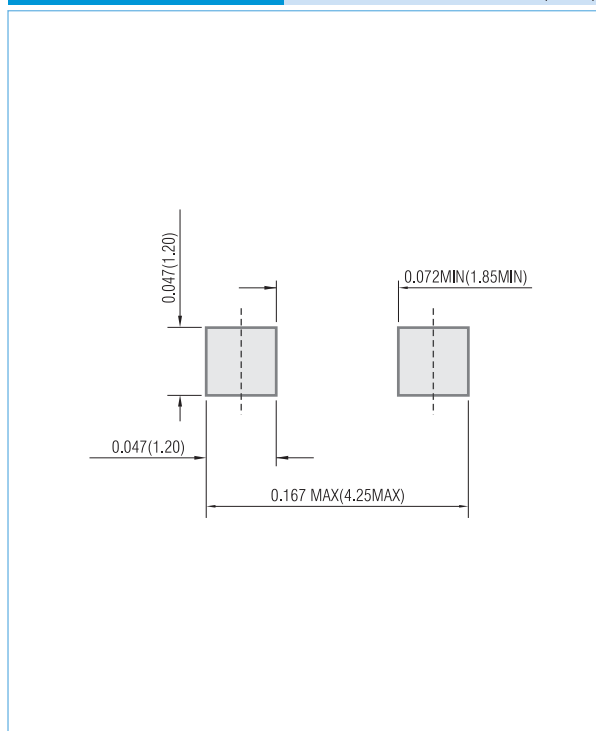

ORDER INFORMATION

- Packing information
 - T/R - 10K per 13" plastic Reel
 - T/R - 3K per 7" plastic Reel

LEGAL STATEMENT

Copyright PanJit International, Inc 2009

The information presented in this document is believed to be accurate and reliable. The specifications and information herein are subject to change without notice. Pan Jit makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. Pan Jit products are not authorized for use in life support devices or systems. Pan Jit does not convey any license under its patent rights or rights of others.