

10.4" Sunlight Readable 電阻式多點觸控面板
 品號 :104D02A2

規格：
 ITO Bar: 36x28

Surface treatment: Anti-glare
 or (Clear)

IC Solution :Ideacom
 or (EETII/UltraChip/ADS)

Glass treatment: Chemically Strengthened
 (1.1mm) or (General Glass)


OS: Android
 or (Window 7/Linux)

Interface:: I2C/USB
 or (RS232)

Funtion: 2 point touch
 or (Single touch+ Gesture /4 point touch/
 All point touch)

Reflection rate:1.5% Haze: 10% b*: 3%

AA 作動區

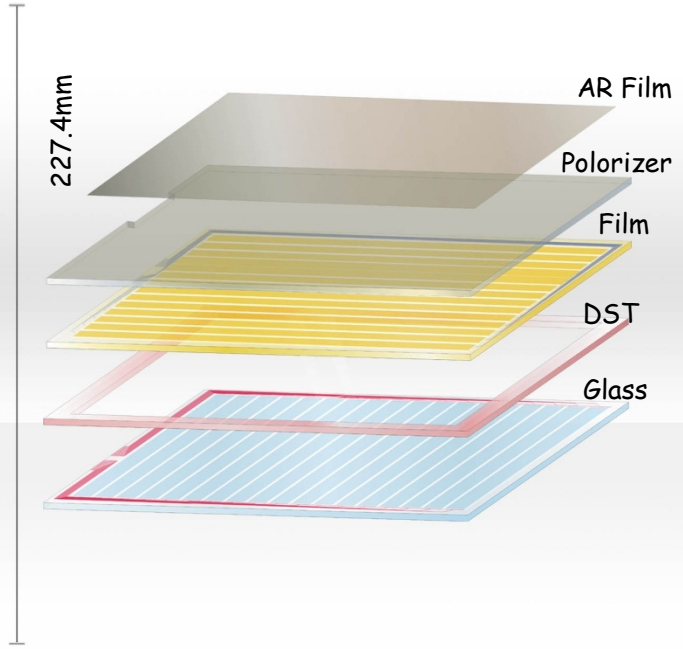

電阻式觸控面板 - - - - - 黃威龍

weilong@mildex.com.tw (07)624-3769ext:2853

Decoration For Touch Panel

Your world view in a Touch, The Partner you can Count on MILDEX OPTICAL INC.
 www.mildex.com.tw NO. 17, Yong Gong 1st Rd, Yang An Hsiang, Kaohsiung Hsien, Taiwan R.O.C.
 Tel.:+886-76243769 Fax:+886-7-6243767 Email:tpsales@mildex.com.tw

14.1" 電阻式多點觸控面板
 品號 :141D01A1

規格：
 ITO Bar: 48x28

Surface treatment: Anti-glare
 or (Clear)

IC Solution :Ideacom
 or (EETI/ UltraChip/ADS)

Glass treatment: Chemically Strengthened
 (1.1mm) or (General Glass)

OS: Android
 or (Window 7/Linux)

Interface:: I2C/USB
 or (RS232)

Funtion: 2 point touch
 or (Single touch+ Gesture /4 point touch/
 All point touch)

AA 作動區

Transmission rate:80% Haze: 8 % b*: 2%

