

16.9" 電阻式全平面觸控面板  
品號 :169401A4



規格：  
**TYPE: Analog resistive 4wire+Digital Button  
or (5wire/8wire)**

**Surface treatment: Clear  
or (Anti-glare)**

**Glass thickness:1.8mm  
or (0.7mm/1.1mm/2.8mm)**

**Glass treatment: Chemically Strengthened  
or (General Glass)**

**Transmission rate:80% Haze: 1.5 % b\*: 2%**

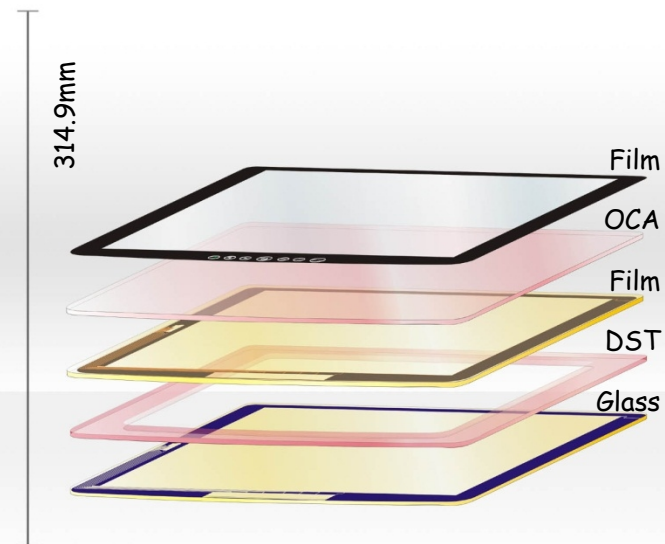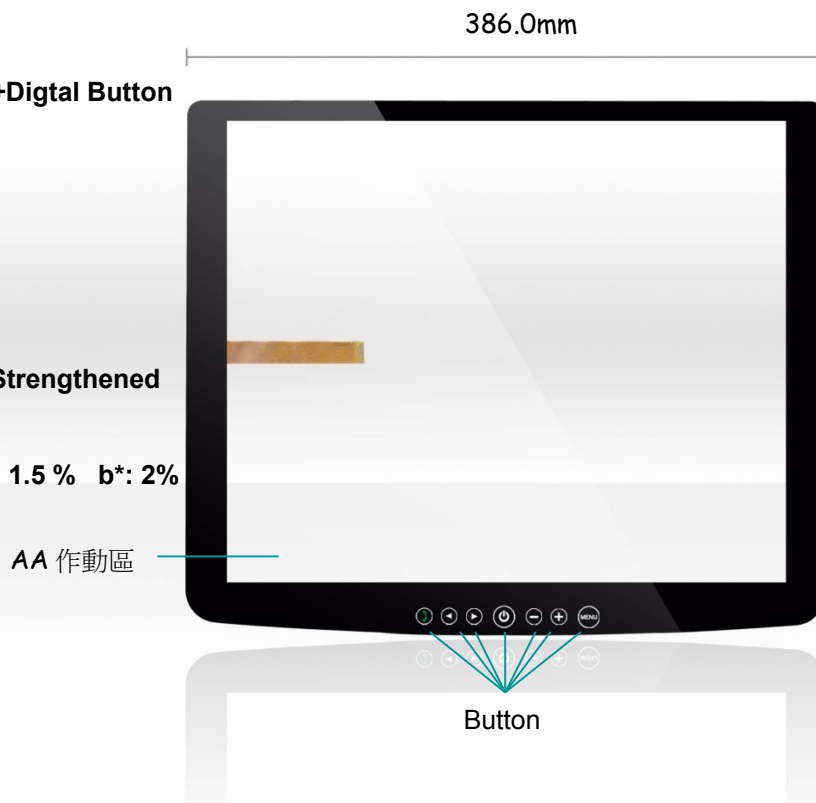

21.5" Sunlight Readable 電阻式多點觸控面板  
 品號 :215D02A1

規格：  
 ITO Bar: 56x34

Surface treatment: Anti-glare  
 or (Clear)

IC Solution :Ideacom  
 or (EETI/ UltraChip/ADS)

Glass treatment: Chemically Strengthened  
 (1.1mm) or (General Glass)

OS: Android  
 or (Window 7/Linux)

Interface:: I2C/USB  
 or (RS232)

Funtion: 2 point touch AA 作動區  
 or (Single touch+ Gesture /4 point touch/  
 All point touch)

Transmission rate:80% Haze: 8 % b\*: 2%

